

TANAIR PNEUMATICS


EPC05 ISO CYLINDERS

ORDERING GUIDE

HOW TO ORDER

ISO6431/VDMA

EPC05

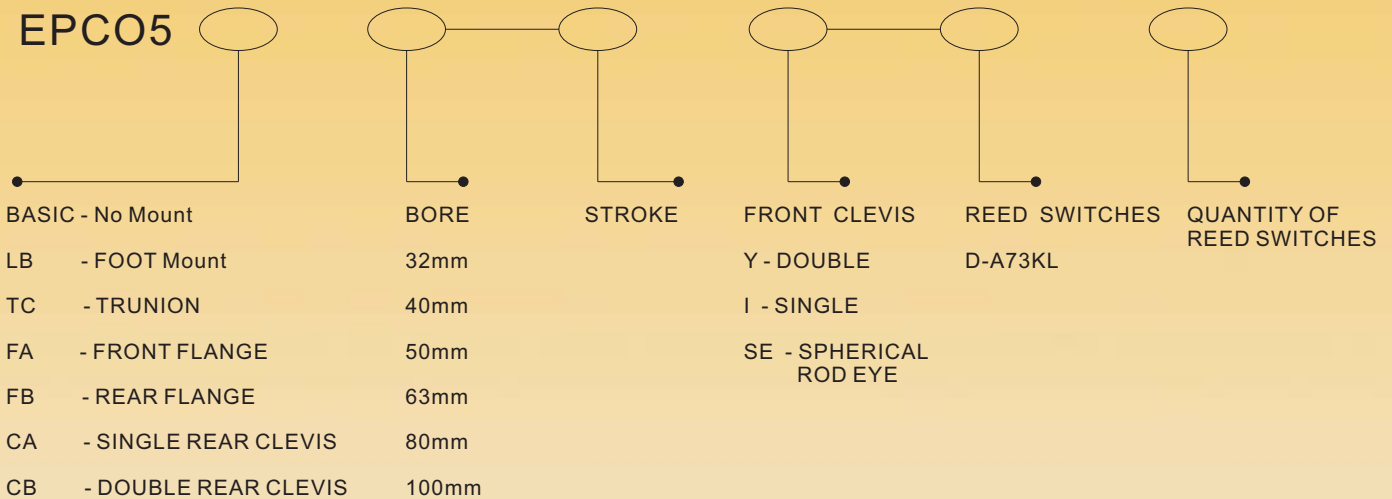

PRESSURE RATING = 10BAR
 TEMPERATURE = -20°C ~ +80°C

LOWER OR HIGHER TEMPERATURE
 VERSIONS AVAILBALE


SEE EASTERN PNEUMATICS AND HYDRAULICS
 FOR MORE SPECIFICATIONS

Main Parts Materials

Cylinder Bore	32 40 50 63 80 100	Cylinder Bore	32 40 50 63 80 100
Cylinder Body	Hard Anodized, Aluminum Lightweight Cylinder Body	O ring, Anti-leakage seal	NBR
Piston	Aluminum Alloy	Wear Ring	TEFLON
Piston Rod	Hard Chrome Plated Carbon Steel	Self Lubricating Bearing	TEFLON
Head Cap Seal	NBR	Head Cap	Black Anolized Aluminum Alloy Blocks
Rod/Wiper Seal	NBR	End Cap	Black Anolized Aluminum Alloy Blocks
O ring/Buffer body seal	NBR	Magnet	Plastic Coated Magnetic Material
O ring/Piston Seal	NBR	Buffer	Bronze
O ring/Cylinder Body End seal	NBR	Buffer	Medium Carbon Steel
O ring/Buffer	NBR	Buffer Screw	Brass

TANAIR PNEUMATICS

EPC05 ISO CYLINDERS




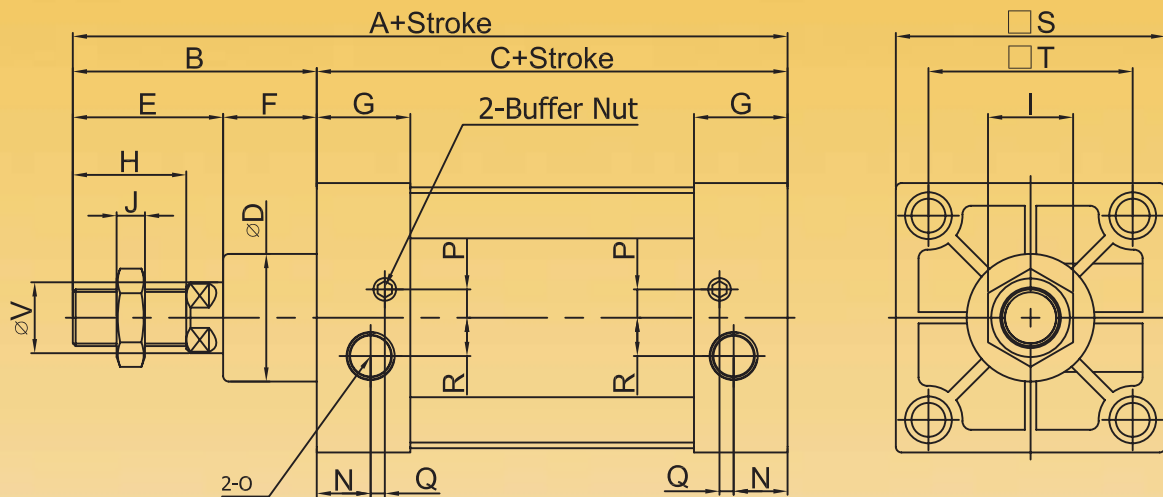


Bore	A	B	C	D	E	F	G	H	I	J	L
32	142	48	94	30	30	18	27.5	22	17	6	M6
40	159	54	105	35	34	20	32	24	19	7	M6
50	175	69	106	40	42	27	31	32	24	8	M8
63	190	69	121	45	40	29	33	32	24	8	M8
80	214	86	128	45	53	33	33	40	30	10	M10
100	229	91	138	55	55	36	37	40	30	10	M10

Bore	K	N	O	P	Q	R	S	T	V	W
32	M10×1.25	13.5	PT1/8	4	7.5	7	47	32.5	12	10
40	M12×1.25	16	PT1/4	6	9.5	9	53	38	16	13
50	M16×1.5	18.5	PT1/4	8.5	6.7	9	65	46.5	20	17
63	M16×1.5	19	PT3/8	6	7.7	9	75	56.5	20	17
80	M20×1.5	19	PT3/8	10	5	13.5	95	72	25	22
100	M20×1.5	18	PT1/2	12.5	10	14.5	115	89	25	22

TANAIR PNEUMATICS

EPC05 ISO CYLINDER MOUNT OPTIONS

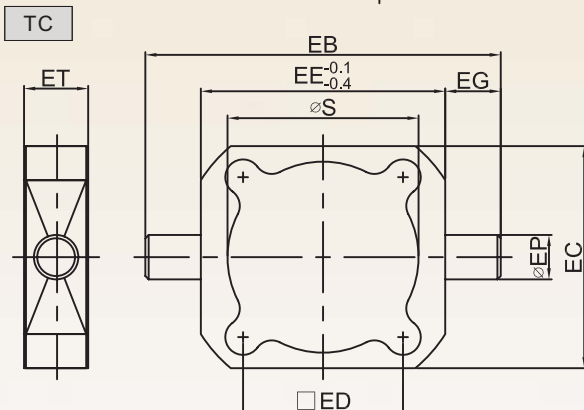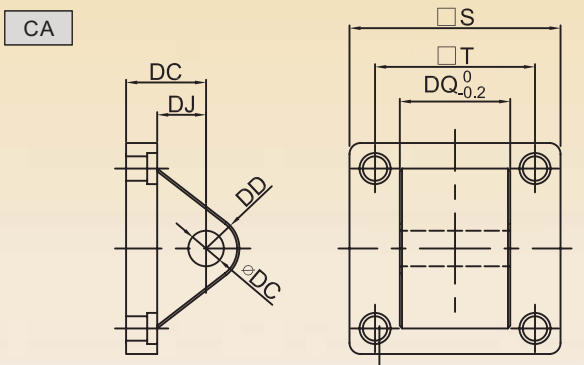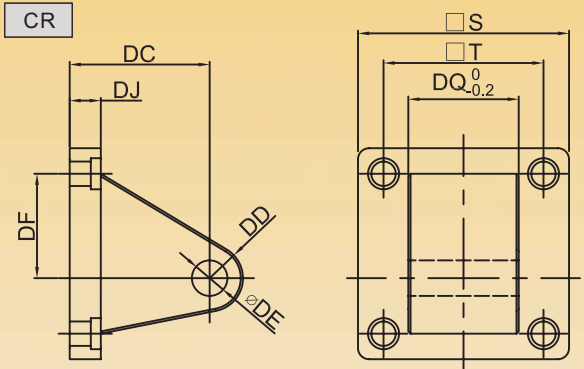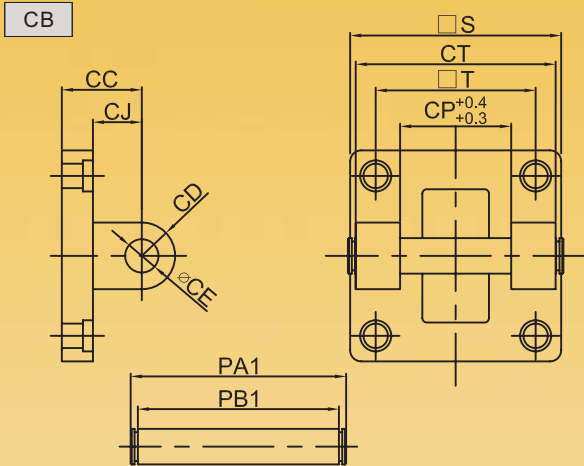

BORE		32	40	50	63	80	100
CC	Metric	22	25	27	32	36	41
	Inch	0.87	0.98	1.06	1.26	1.42	1.61
CD	Metric	9	12	12	15	15	20
	Inch	0.35	0.47	0.47	0.59	0.59	0.79
CE	Metric	10	12	12	16	16	20
	Inch	0.39	0.47	0.47	0.63	0.63	0.79
CJ	Metric	13	16	17	22	22	27
	Inch	0.51	0.63	0.67	0.87	0.87	1.06
CP	Metric	26	28	32	40	50	60
	Inch	1.02	1.10	1.26	1.57	1.97	2.36
CT	Metric	45	52	60	70	90	110
	Inch	1.77	2.05	2.36	2.76	3.54	4.33
PA1	Metric	51	59	67	77	97	119
	Inch	2.01	2.32	2.64	3.03	3.82	4.69
PB1	Metric	45.5	52.5	60.5	70.5	90.5	110.5
	Inch	1.79	2.07	2.38	2.78	3.56	4.35
S	Metric	47	53	65	75	95	115
	Inch	1.85	2.09	2.56	2.95	3.74	4.53
T	Metric	32.5	38	46.5	56.5	72	89
	Inch	1.28	1.50	1.83	2.22	2.83	3.50

BORE		32	40	50	63	80	100
DC	Metric	32	36	45	50	63	70
	Inch	1.26	1.42	1.77	1.97	2.48	2.76
DD	Metric	10	11	13	15	15	19
	Inch	0.39	0.43	0.51	0.59	0.59	0.75
DE	Metric	10	12	12	16	16	20
	Inch	0.39	0.47	0.47	0.63	0.63	0.79
DF	Metric	21	24	33	37	47	55
	Inch	0.83	0.94	1.30	1.46	1.85	2.17
DJ	Metric	8	10	12	12	14	15
	Inch	0.31	0.39	0.47	0.47	0.55	0.59
DQ	Metric	25.8	27.8	31.7	39.7	49.7	59.7
	Inch	1.02	1.09	1.25	1.56	1.96	2.35
S	Metric	47	53	65	75	95	115
	Inch	1.85	2.09	2.56	2.95	3.74	4.53
T	Metric	32.5	38	46.5	56.5	72	89
	Inch	1.28	1.50	1.83	2.22	2.83	3.50


BORE		32	40	50	63	80	100
DC	Metric	22	25	27	32	36	41
	Inch	0.87	0.98	1.06	1.26	1.42	1.61
DD	Metric	9	12	12	15	15	20
	Inch	0.35	0.47	0.47	0.59	0.59	0.79
DE	Metric	10	12	12	16	16	20
	Inch	0.39	0.47	0.47	0.63	0.63	0.79
DJ	Metric	13	16	17	22	22	27
	Inch	0.51	0.63	0.67	0.87	0.87	1.06
DQ	Metric	25.8	27.8	31.7	39.7	49.7	59.7
	Inch	1.02	1.09	1.25	1.56	1.96	2.35
S	Metric	47	53	65	75	95	115
	Inch	1.85	2.09	2.56	2.95	3.74	4.53
T	Metric	32.5	38	46.5	56.5	72	89
	Inch	1.28	1.50	1.83	2.22	2.83	3.50

BORE		32	40	50	63	80	100
EB	Metric	100	113	125	140	160	182
	Inch	3.94	4.45	4.92	5.51	6.30	7.17
EC	Metric	50	58	70	80	100	126
	Inch	1.97	2.28	2.76	3.15	3.94	4.96
ED	Metric	32.5	38	46.5	56.5	72	89
	Inch	1.28	1.50	1.83	2.22	2.83	3.50
EE	Metric	50	63	75	90	110	132
	Inch	1.97	2.48	2.95	3.54	4.33	5.20
EG	Metric	25	25	25	25	25	25
	Inch	0.98	0.98	0.98	0.98	0.98	0.98
EP	Metric	12	16	16	20	20	25
	Inch	0.47	0.63	0.63	0.79	0.79	0.98
ET	Metric	20	24	28	28	28	28
	Inch	0.79	0.94	1.10	1.10	1.10	1.10
S	Metric	36	45	55	68	86	106
	Inch	1.42	1.77	2.17	2.68	3.39	4.17

TANAIR PNEUMATICS


EPC05 ISO CYLINDER MOUNT OPTIONS

LB

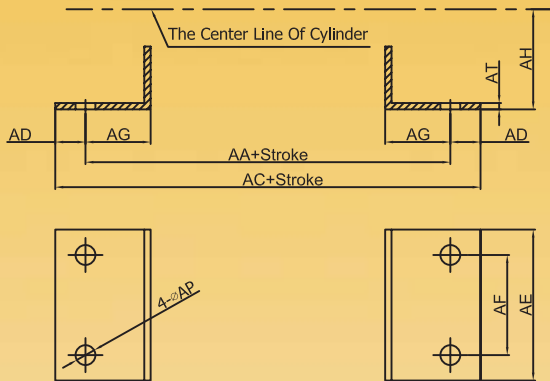


BORE		32	40	50	63	80	100
AC	Metric	158	179	190	209	248	258
	Inch	6.22	7.05	7.48	8.23	9.76	10.16
AA	Metric	142	161	170	185	210	220
	Inch	5.59	6.34	6.69	7.29	8.27	8.66
AD	Metric	8	9	10	12	19	19
	Inch	0.31	0.35	0.39	0.47	0.75	0.75
AE	Metric	47	53	63	75	95	115
	Inch	1.85	2.09	2.48	2.95	3.74	4.53
AF	Metric	32	36	45	50	63	75
	Inch	1.26	1.42	1.77	1.97	2.48	2.95
AG	Metric	24	28	32	32	41	45
	Inch	0.94	1.10	1.26	1.26	1.61	1.77
AH	Metric	32	36	45	50	63	71
	Inch	1.26	1.42	1.77	1.97	2.48	2.80
AP	Metric	7	9	9	9	12.5	14.5
	Inch	0.28	0.35	0.35	0.35	0.49	0.57
AT	Metric	3	3	3	3	4	4
	Inch	0.12	0.12	0.12	0.12	0.16	0.16

FA&FB

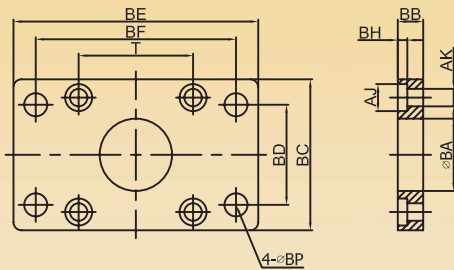

BORE		32	40	50	63	80	100
AJ	Metric	11	11	13	13	17	17
	Inch	0.43	0.43	0.51	0.51	0.67	0.67
AK	Metric	7	7	9	9	11	11
	Inch	0.28	0.28	0.35	0.35	0.43	0.43
BA	Metric	30.5	35.5	40.5	45.5	45.5	55.5
	Inch	1.20	1.40	1.59	1.79	1.79	2.19
BB	Metric	10	10	12	12	16	16
	Inch	0.39	0.39	0.47	0.47	0.63	0.63
BC	Metric	47	53	65	75	95	115
	Inch	1.85	2.09	2.56	2.95	3.74	4.53
BE	Metric	80	90	110	125	154	186
	Inch	3.15	3.54	4.33	4.92	6.06	7.32
BD	Metric	32	36	45	50	63	71
	Inch	1.26	1.42	1.77	1.97	2.48	2.80
BP	Metric	7	9	9	9	12.5	14.5
	Inch	0.28	0.35	0.35	0.35	0.49	0.57
BF	Metric	64	72	90	100	126	150
	Inch	2.52	2.83	3.54	3.94	4.96	5.91
BH	Metric	4	4	6	4	6	6
	Inch	0.16	0.16	0.24	0.16	0.24	0.24
T	Metric	32.5	38	46.5	56.5	72	89
	Inch	1.28	1.50	1.83	2.22	2.83	3.50

TC-M

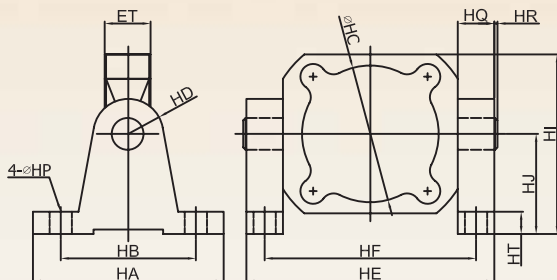


BORE		32	40	50	63	80	100
HA	Metric	110	110	110	120	120	120
	Inch	4.33	4.33	4.33	4.72	4.72	4.72
HB	Metric	80	80	80	80	85	85
	Inch	3.15	3.15	3.15	3.15	3.35	3.35
HC	Metric	36	45	55	58	86	106
	Inch	1.42	1.77	2.17	2.28	3.39	4.17
HD	Metric	22	22	22	22	22	22
	Inch	0.87	0.87	0.87	0.87	0.87	0.87
HE	Metric	96	109	121	136	156	178
	Inch	3.78	4.29	4.76	5.35	6.14	7.01
HF	Metric	73	86	98	113	133	155
	Inch	2.87	3.39	3.86	4.45	5.24	6.10
HJ	Metric	43.5	47.5	47	46	63	67
	Inch	1.71	1.87	1.85	1.81	2.48	2.64
HI	Metric	68.5	76.5	82	86	113	130
	Inch	2.70	3.01	3.23	3.39	4.45	5.12
HQ	Metric	23	23	23	23	23	23
	Inch	0.91	0.91	0.91	0.91	0.91	0.91
HR	Metric	2	2	2	2	2	2
	Inch	0.08	0.08	0.08	0.08	0.08	0.08
HT	Metric	12	12	12	12	14	14
	Inch	0.47	0.47	0.47	0.47	0.55	0.55
HP	Metric	12	12	12	12	14	14
	Inch	0.47	0.47	0.47	0.47	0.55	0.55


TANAIR PNEUMATICS

EPC05 ISO CYLINDER MOUNT OPTIONS

Y TYPE

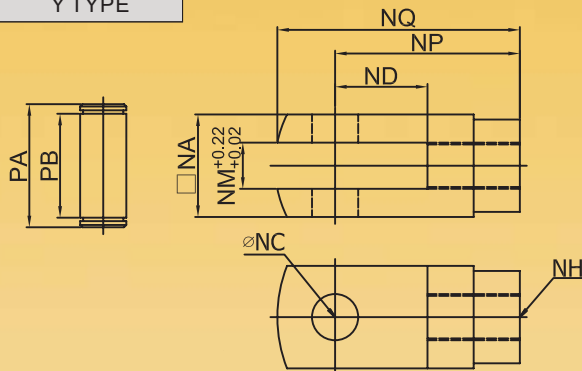


I TYPE

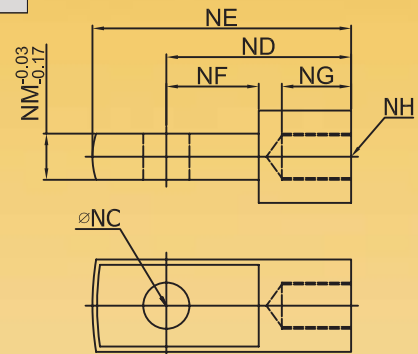


BORE	NA		NC		ND		NE		NF		NG		NH	NM		NP		NQ		PA		PB	
	Metric	Inch	Metric	Inch	Metric	Inch	Metric	Inch	Metric	Inch	Metric	Inch		Metric	Inch	Metric	Inch	Metric	Inch	Metric	Inch	Metric	Inch
32	19	0.75	10	0.39	40	1.57	52	2.05	15	0.59	20	0.79	M10×1.25	10	0.39	20	0.79	52	2.05	26.2	1.03	20	0.79
40	25.4	1.00	12	0.47	48	1.89	67	2.64	24	0.94	20	0.79	M12×1.25	12	0.47	24	0.94	62	2.44	32.8	1.29	26.5	1.04
50	32	1.26	16	0.63	64	2.52	89	3.50	32	1.26	23	0.91	M16×1.5	16	0.63	32	1.26	83	3.27	39.3	1.55	33	1.30
63	32	1.26	16	0.63	64	2.52	89	3.50	32	1.26	23	0.91	M16×1.5	16	0.63	32	1.26	83	3.27	39.3	1.55	33	1.30
80	44.4	1.75	20	0.79	80	3.15	112	4.41	40	1.57	30	1.18	M20×1.5	20	0.79	40	1.57	105	4.13	53.3	2.10	45	1.77
100	44.4	1.75	20	0.79	80	3.15	112	4.41	40	1.57	30	1.18	M20×1.5	20	0.79	40	1.57	105	4.13	53.3	2.10	45	1.77

FLOATING TYPE



BORE	MA		MB		MC		MD		ME		MF		MG	MH		MI
	Metric	Inch	Metric	Inch	Metric	Inch	Metric	Inch	Metric	Inch	Metric	Inch		Metric	Inch	
32	73	2.87	20	0.79	6	0.24	45	1.77	8	0.31	26	1.02	M10×1.25	12	0.47	M10×1.25
40	77	3.03	24	0.94	7	0.28	46	1.81	7	0.28	26	1.02	M12×1.25	12	0.47	M12×1.25
50	106	4.17	32	1.26	8	0.31	62	2.44	12	0.47	34	1.34	M16×1.5	19	0.75	M16×1.5
63	106	4.17	32	1.26	8	0.31	62	2.44	12	0.47	34	1.34	M16×1.5	19	0.75	M16×1.5
80	122	4.80	40	1.57	10	0.39	68	2.68	14	0.55	42	1.65	M20×1.5	19	0.75	M20×1.5
100	122	4.80	40	1.57	10	0.39	68	2.68	14	0.55	42	1.65	M20×1.5	19	0.75	M20×1.5

BEARING TYPE

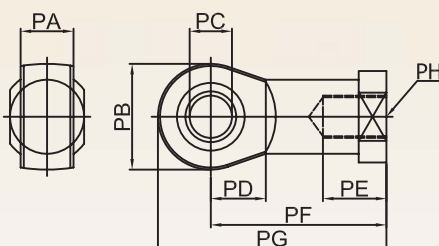

BORE	PA		PB		PC		PD		PE		PF		PG		PH
	Metric	Inch	Metric	Inch	Metric	Inch	Metric	Inch	Metric	Inch	Metric	Inch	Metric	Inch	
32	14	0.55	28	1.10	10	0.39	15	0.59	20	0.79	43	1.69	57	2.24	M10×1.25
40	16	0.63	32	1.26	12	0.47	17	0.67	22	0.87	50	1.97	66	2.60	M12×1.25
50	21	0.83	42	1.65	16	0.63	22	0.87	28	1.10	64	2.52	85	3.35	M16×1.5
63	21	0.83	42	1.65	16	0.63	22	0.87	28	1.10	64	2.52	85	3.35	M16×1.5
80	25	0.98	50	1.97	20	0.79	26	1.02	33	1.30	77	3.03	102	4.02	M20×1.5
100	25	0.98	50	1.97	20	0.79	26	1.02	33	1.30	77	3.03	102	4.02	M20×1.5